

SPECIFICATION LIRGB03




Application:

- Ideal for light box and 3D letters with depth 60-180MM


Features:

- Adopts 5050 RGB LED chips.
- Light decay <3% for 6000hrs
- HB fire safety level
- IP65 waterproof
- Cuttable every module
- 3 years warranty

Beam Angle:160°

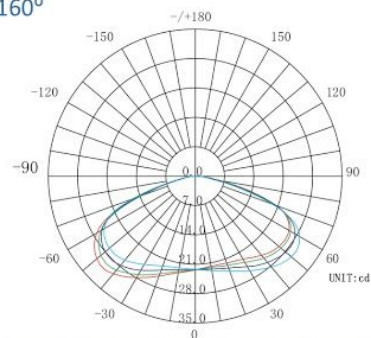



Dimensions:

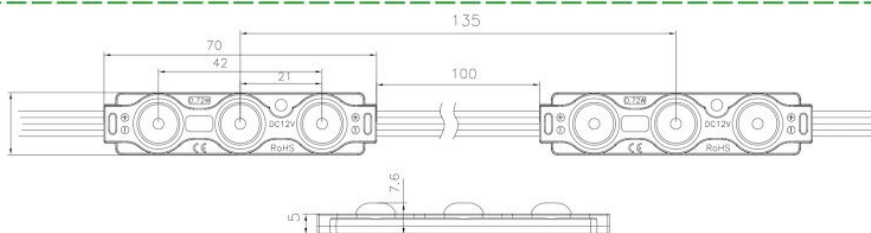


Order INFO and Parameter:

Part No.	Voltage	Power/pcs	Lumen/pcs	LED Type	Ra	Housing material	Dimensio	Working TEMP	Color
OP-5ALSM7016-3RGB	DC12V	0.72W	R:6LM G:20LM B:5LM	SMD 5050	>70	ABS	70*16*7.6mm	-25°C to +60 °C	RGB

Installation Reference:



Depth(H)	Light Box (L*W)	Distance (dx;dy)	Qty/m²	Power/m²	Lux/m²
80mm	1000*1000mm	150mm	50pcs	36W	2980
100mm	1000*1000mm	180mm	36pcs	26W	2150
120mm	1000*1000mm	200mm	25pcs	18W	1560
150mm	1000*1000mm	220mm	20pcs	14.4W	980

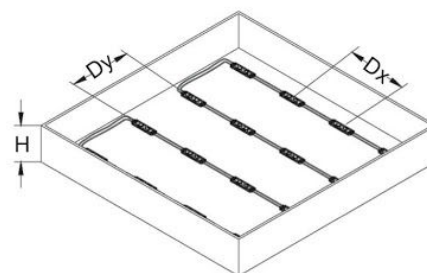

Packing Details:

Packing	Qty/chain	Qty/bag	Qty/carton	Carton Size
Qty	20pcs	200pcs	2000pcs	54*32*43cm
Weight	0.21KG	2.1KG	23.5KG	